



DESCRIPTION OF STANDARD UNIT:


- Sides of powder-coated steel
- Low temperature e-doors, hinged
- Grey bumper
- 5 rows of adjustable perforated shelves
- Vertical lighting
- For external condensing unit – cooling power demand 650÷750 W/1mr at evaporating temp. -35°C
- Expansion valve
- Temperature range: -18 ÷ -22°C

OPTIONS

- Multiplexing
- Refrigerated version

TYPE SZ-1 OS	Length with sides (mm)	Depth (mm)	Height (mm)	Quantity of doors (pcs.)	Capacity (l)	Weight (kg)	Power supply (W)
1D/80 1D/90	915	815/915	2020±30	1	560/680	150/170	1950
2D/80 2D/90	1735			2	1100/1350	300/320	3165
3D/80 3D/90	2505			3	1600/2000	490/530	4400

*Side 60 mm

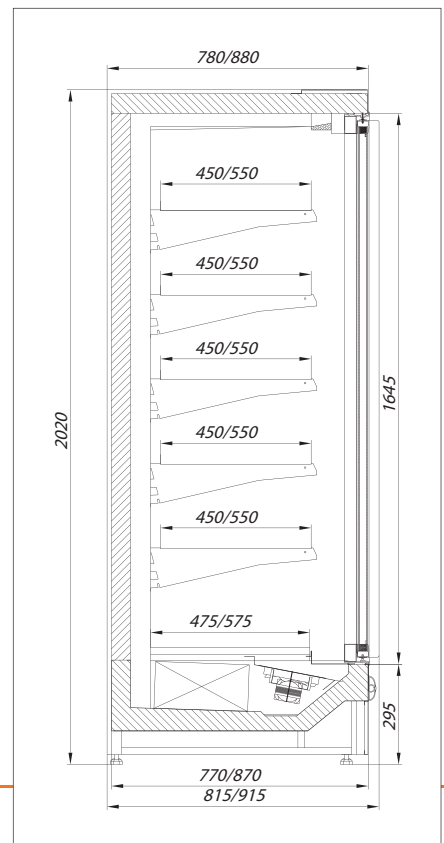



Display Freezers