


DESCRIPTION OF STANDARD UNIT WITH SHUTTER:

- Construction of stainless steel
- Solid sides
- 5 rows of adjustable shelves
- T5 canopy lighting
- Lockable Roller Shutter (silver)
- Temp. range: +2 - +8°C
- Automatic water evaporation

OPTIONS:

- Highlighted shelves
 - Hooks for meat
 - Plexiglas or wired shelf stoppers
 - Wheels
 - Multiplexing
- For external condensing unit (AZ) – cooling power demand: 1500 W/1mr at evaporating temp. -10°C

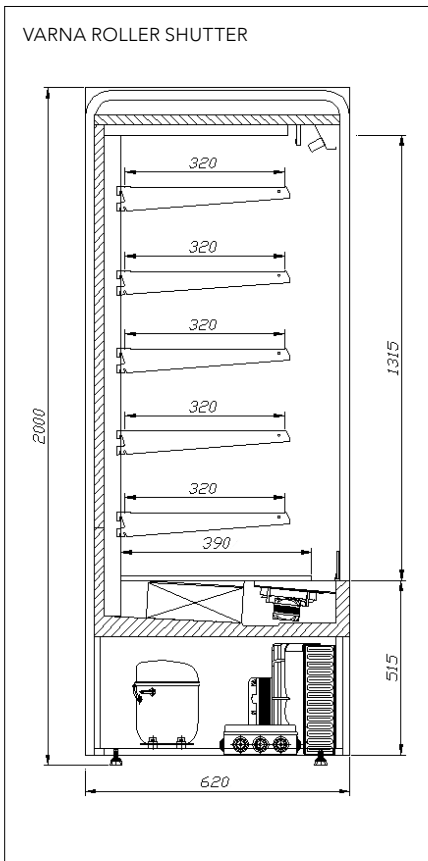

TYPE R-1 MVR	Length with sides* (mm)	Depth (mm)	Height (mm)	Useful surface (m ²)	Weight (kg)	Daily consumption (kWh/24h)
60	600	620	2000±30	1,1	110	9,0
110	1100			1,9	180	13,0
130	1300			2,3	200	14,0
160	1600			2,9	230	15,0
190	1900			3,5	250	21,0
210	2100			3,8	265	23,0
250	2500			4,4	300	38,0