



DESCRIPTION OF STANDARD UNIT:

- 3 versions: refrigerated (CH), hot (GR) and neutral (NE)
- Construction of powder coated steel
- Version for individual decoration (DZ) or in 3 types of casing (Classic, Retro and Modern)
- Toughened, flat front and side glasses
- Stainless steel exposition trays
- Highlighted exposition part
- Stainless steel worktop
- Rear Plexiglas's shutter
- Socket under the worktop
- Forced cooling
- Temperature range $+2 \pm 8^{\circ}\text{C}$ / $+40 \pm 90^{\circ}\text{C}$ (hot version)
- Automatic condensate evaporation

OPTIONS:

- Multiplexing
- LED lighting
- Heated lamps for hot version
- Glass shelf
- Plexiglas separators
- Granite worktop
- Night blind
- Stainless steel shelf for a customer (tube or square profile)
- Stainless steel bumper
- Stainless steel tank for ice
- Grate for bread with crumb's tray
- 2-steps tray
- Sliding stainless steel shelf for worktop
- For external condensing unit (AZ): cooling power demand: 550 W/1mr at evaporating temp. -10°C

CLASSIC



MODERN



RETRO



TYPE C-1 CP	Length with sides*(mm)	Depth (mm)	Height (mm)	Useful surface (m²)	Weight (kg)	Daily consumption (kWh/24h)
125/CH	1290	1110	1230±30	0,95	110	3,0
125/GR	1290			0,95	95	9,5
125/NE	1290			0,95	95	0,25

CH – forced cooling GR – heated NE – neutral * Side 20 mm


RETRO 2




CLASSIC Z



CP CH

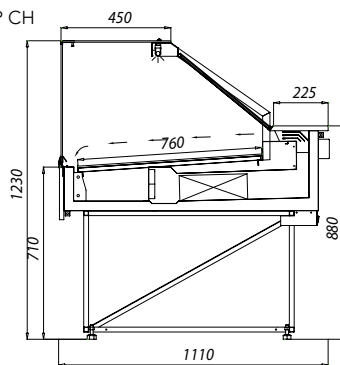

CP GR

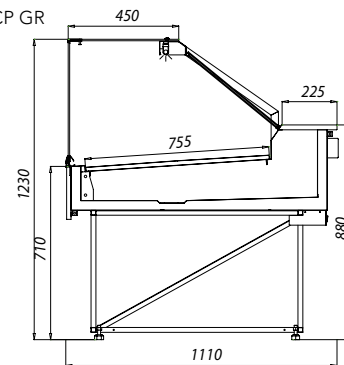

CP DZ

